



# Huawei AirEngine 5762C-10-V2 Access Point Datasheet

## Product Overview

Huawei AirEngine 5762C-10-V2 is an indoor Wi-Fi 6 (802.11ax) access point (AP). It provides services simultaneously on the 2.4 GHz (2x2 MIMO) and 5 GHz (2x2 MIMO) frequency bands, achieving a maximum device rate of 2.975 Gbps. It supports high bandwidth, high concurrency, and compact size, facilitating flexible deployment and saving customer investment. It is applicable to indoor coverage scenarios, such as small- and medium-sized enterprise (SME) office, hospitals, and cafes.



AirEngine 5762C-10-V2

- Working simultaneously on its two radios: 2.4 GHz (2x2) + 5 GHz (2x2), providing a maximum rate of 575 Mbps and 2.4 Gbps, respectively, and a rate of up to 2.975 Gbps for the device.
- 1 x GE electrical port.
- Built-in smart antennas that automatically adjust the coverage direction and signal strength based on the intelligent switchover algorithm to adapt to the changing application environment, providing accurate and stable coverage as stations (STAs) move.
- Working modes: Fit, Fat, and cloud management.

## Feature Description

### Wi-Fi 6 (802.11ax) Standard

- As the latest Wi-Fi standard defined in IEEE 802.11, 802.11ax improves the user access capacity and bandwidth in high-density access scenarios, reducing service latency and enhancing user experience.
- Multi-user multiple-input multiple-output (MU-MIMO) on both the 2.4 GHz and 5 GHz frequency bands, allowing an AP to transmit data to and receive data from multiple STAs simultaneously and multiplying the utilization of radio spectrum resources.
- 1024-quadrature amplitude modulation (QAM), improving data transmission efficiency by 25% compared with 802.11ac (256-QAM).
- Spatial reuse (SR) technology uses basic service set (BSS) coloring to enable the AP and STAs to distinguish overlapping BSSs, minimizing co-channel interference.
- Target Wake Time (TWT) technology allows the AP and STAs to negotiate the sleep and wake time with each other, thereby improving the battery life of the STAs.

## MU-MIMO

The AP supports MU-MIMO and supports a maximum of four spatial streams (two on the 2.4 GHz frequency band and two on the 5 GHz frequency band). The MU-MIMO technology enables an AP to send data to multiple STAs simultaneously, which doubles the radio spectrum resource usage, increases the number of access users and bandwidth, and improves user experience in high-density access scenarios.

## High-Speed Access

The AP supports 160 MHz frequency bandwidth, which increases the number of available data subcarriers and expands transmission channels. In addition, the AP adopts 1024-QAM and MU-MIMO to achieve a rate of up to 0.575 Gbps on the 2.4 GHz band and 2.4 Gbps on the 5 GHz band, meaning up to 2.975 Gbps for the device.

## High Density Boost Technology

Huawei uses the following technologies to address challenges in high-density scenarios, including access problems, data congestion, and poor roaming experience:

### SmartRadio for air interface optimization

- Load balancing during smart roaming: The load balancing algorithm is used to perform load balancing detection on APs after STA roam, and adjust the STA load on each AP accordingly to improve network stability.
- Intelligent Dynamic Frequency Assignment (DFA) technology: The DFA algorithm is used to automatically detect adjacent-channel and co-channel interference, and identify any redundant 2.4 GHz radio. Through automatic inter-AP negotiation, a redundant radio is automatically switched to another mode or is disabled to reduce 2.4 GHz co-channel interference and increase the system capacity.
- Intelligent conflict optimization technology: Dynamic enhanced distributed channel access (EDCA) and airtime scheduling algorithms are used to schedule the channel occupation time and service priority of each STA. This ensures that each STA is assigned a relatively equal amount of time for using channel resources and user services are scheduled in an orderly manner, improving service processing efficiency and user experience.

### Air interface performance optimization

- In high-density access scenarios, access of many low-rate STAs consumes many resources on the air interface, compromises the AP capacity, and degrades user experience. To address this issue, the AP checks the access rate of STAs and denies access of low-rate or weak-signal STAs. In addition, the AP monitors the rate and signal strength of online STAs in real time, disconnects low-rate or weak-signal STAs, and then steers these STAs to APs with stronger signals. This STA access control technology can increase air interface utilization and allow access of more STAs.

### 5G-prior access

- The AP supports both 2.4 GHz and 5 GHz frequency bands. The 5G-prior access function enables the AP to steer STAs to the 5 GHz frequency band preferentially, which reduces loads and interference on the 2.4 GHz frequency band, improving user experience.

## Wired and Wireless Security Guarantee

To ensure data security, Huawei APs integrate wired and wireless security measures and provide comprehensive security protection.

### Authentication and encryption for wireless access

- The AP supports WEP, WPA/WPA2-PSK, WPA/WPA2/WPA3 authentication/encryption modes to ensure security of the wireless network. The authentication mechanism is used to authenticate user identities so that only authorized users can access network resources. The encryption mechanism is used to encrypt data transmitted over wireless links to ensure that data can only be received and parsed by authorized users.

### Authentication and encryption for wired access

- The AP access control mechanism ensures that only authorized users can access the AP. Control and provisioning of wireless access point (CAPWAP) link protection and DTLS encryption provide security guarantee and improve data transmission security between the AP and WAC.

## Automatic Radio Calibration

Automatic radio calibration allows the AP to collect signal strength, channel, and other parameters of surrounding APs and generate an AP topology according to the collected data. Based on interference from other authorized APs, rogue APs, and non-Wi-Fi interference sources, and their loads, the AP automatically adjusts its transmit power and working channel to make the network operate at the optimal performance. In this way, network reliability and user experience are improved.

## Cloud Management

The AP supports cloud-based management. It provides various authentication functions, such as PSK, Portal, SMS, and social media authentication, without the need of a WAC or an authentication server. This greatly simplifies networking and reduces CAPEX. In addition, the AP can be deployed on a cloud management platform to implement cloud-based network planning, deployment, inspection, and O&M. In multi-branch deployment scenarios, after cloud APs are pre-configured on the cloud management platform, deployment personnel only need to power on the cloud APs on site, connect them to network ports of switches. Then the pre-configurations are automatically delivered to the APs. This greatly accelerates network deployment. The cloud management platform can monitor the network status, device status, and STA connection status at all sites of tenants in a comprehensive and intuitive manner.

# Product Features

## Fat/Fit AP Mode

Item	Description
WLAN features	<p>Compliance with IEEE 802.11ax and compatibility with IEEE 802.11a/b/g/n/ac/ac Wave 2</p> <p>Maximum ratio combining (MRC)</p> <p>Space time block code (STBC)</p> <p>Cyclic delay diversity (CDD)/Cyclic shift diversity (CSD)</p> <p>Beamforming</p> <p>MU-MIMO</p> <p>Per-packet power control</p> <p>BSS Color</p> <p>TxBF</p> <p>Compliance with 1024-QAM and compatibility with 256-QAM/64-QAM/16-QAM/8-QAM/QPSK/BPSK</p> <p>TWT</p> <p>Low-density parity-check (LDPC)</p> <p>Frame aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Tx/Rx)</p> <p>802.11 dynamic frequency selection (DFS)</p> <p>Short guard interval (GI) in 20 MHz, 40 MHz, 80 MHz, and 160 MHz modes</p> <p>Priority mapping and scheduling that are compliant with Wi-Fi multimedia (WMM) to implement priority-based data processing and forwarding; automatic and manual rate adjustment (the rate is adjusted automatically by default)</p> <p>WLAN channel management and channel rate adjustment</p> <p><b>NOTE</b></p> <p>For detailed management channels, see <i>Country Code &amp; Channel Compliance Table</i>.</p> <p>Automatic channel scanning and interference avoidance</p> <p>Separate service set identifier (SSID) hiding configuration for each AP, supporting Chinese SSIDs</p> <p>Signal sustain technology (SST)</p> <p>Unscheduled automatic power save delivery (U-APSD)</p> <p>CAPWAP in Fit AP mode</p> <p>Extended service set (ESS) in Fit AP mode</p> <p>Advanced cellular coexistence (ACC), minimizing the impact of interference from cellular networks</p> <p>Multi-user CAC</p> <p>802.11k and 802.11v smart roaming</p> <p>802.11r fast roaming (<math>\leq 50</math> ms)</p>

Item	Description
Network features	<p>Compliance with IEEE 802.3ab</p> <p>Auto-negotiation of the rate and duplex mode and automatic switchover between the Media Dependent Interface (MDI) and Media Dependent Interface Crossover (MDI-X)</p> <p>Compliance with IEEE 802.1Q</p> <p>SSID-based VLAN assignment</p> <p>VLAN trunk on uplink Ethernet ports</p> <p>Management channel of the AP's uplink port in tagged or untagged mode</p> <p>DHCP client, obtaining IP addresses through DHCP</p> <p>Tunnel data forwarding and direct data forwarding</p> <p>STA isolation in the same VLAN</p> <p>IPv4/IPv6 access control list (ACL)</p> <p>Link layer discovery protocol (LLDP)</p> <p>Uninterrupted service forwarding upon CAPWAP tunnel disconnection in Fit AP mode</p> <p>Unified authentication on the WAC in Fit AP mode</p> <p>WAC dual-link backup in Fit AP mode</p> <p>Network address translation (NAT) in Fat AP mode</p> <p>IPv6 in Fit AP mode</p> <p>Telemetry in Fit AP mode, quickly collecting AP status and application experience parameters</p> <p>IPv6 source address validation improvements (SAVI)</p> <p>Multicast Domain Name Service (mDNS) gateway protocol</p>
QoS features	<p>Priority mapping and scheduling that are compliant with WMM to implement priority-based data processing and forwarding</p> <p>WMM parameter management for each radio</p> <p>WMM power saving</p> <p>Priority mapping for uplink packets; flow-based mapping for downlink packets</p> <p>Queue mapping and scheduling</p> <p>User-based bandwidth limiting</p> <p>Adaptive bandwidth management (automatic bandwidth adjustment based on the user quantity and radio environment) for user experience improvement</p> <p>Air interface HQoS scheduling</p>

Item	Description
Security features	<p>Open system authentication</p> <p>WEP authentication and encryption using a 64-bit, 128-bit, or 152-bit encryption key</p> <p>WPA2-PSK authentication and encryption (WPA2-Personal)</p> <p>WPA2-802.1X authentication and encryption (WPA2-Enterprise)</p> <p>WPA3 authentication and encryption</p> <p>WPA-WPA2 hybrid authentication</p> <p>WPA2-WPA3 hybrid authentication</p> <p>WPA2-PPSK authentication and encryption in Fit AP mode</p> <p>802.1X authentication, MAC address authentication, Portal authentication, etc.</p> <p>DHCP snooping</p> <p>Dynamic ARP inspection (DAI)</p> <p>IP Source Guard (IPSG)</p> <p>802.11w Protected Management Frames (PMF)</p> <p>DTLS encryption</p>
EAP types	EAP-TLS, EAP-TTLS, EAP-PEAP, EAP-CHAP, EAP-SIM, EAP-AKA, EAP-GTC, EAP-FAST, EAP-PEAP, EAP-MD5, EAP-MSCHAPv2, PEAPv0, PEAPv1
Maintenance features	<p>Unified management and maintenance on the WAC in Fit AP mode</p> <p>Automatic login, automatic configuration loading, and plug-and-play (PnP) in Fit AP mode</p> <p>Automatic batch upgrade in Fit AP mode</p> <p>Telnet</p> <p>STelnet using SSHv2</p> <p>SFTP using SSHv2</p> <p>Web system-based AP management and login through HTTP or HTTPS in Fat AP mode</p> <p>Real-time configuration monitoring and fast fault locating using the NMS</p> <p>SNMPv1/v2/v3 in Fat AP mode</p> <p>System status alarm</p> <p>Network Time Protocol (NTP) in Fat AP mode</p>



Item	Description
BYOD	<p><b>NOTE</b></p> <p>The AP supports BYOD only in Fit AP mode.</p> <p>Device type identification according to the organizationally unique identifier (OUI) in the MAC address</p> <p>Device type identification based on the user agent (UA) information in an HTTP packet</p> <p>Device type identification based on DHCP options</p> <p>The RADIUS server delivers packet forwarding, security, and QoS policies according to the device type carried in the RADIUS authentication and accounting packets.</p>

## Cloud Management Mode


Item	Description
WLAN features	<p>Compliance with IEEE 802.11a/b/g/n/ac/ac Wave 2/ax</p> <p>MRC</p> <p>STBC</p> <p>CDD/CSD</p> <p>Beamforming</p> <p>MU-MIMO</p> <p>Per-packet power control</p> <p>BSS Color</p> <p>TxBF</p> <p>Compliance with 1024-QAM and compatibility with 256-QAM/64-QAM/16-QAM/8-QAM/QPSK/BPSK</p> <p>TWT</p> <p>LDPC</p> <p>Frame aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Tx/Rx)</p> <p>802.11 DFS</p> <p>Short GI in 20 MHz, 40 MHz, 80 MHz, and 160 MHz modes</p> <p>Priority mapping and scheduling that are compliant with WMM to implement priority-based data processing and forwarding</p> <p>WLAN channel management and channel rate adjustment</p> <p><b>NOTE</b></p> <p>For detailed management channels, see <i>Country Code &amp; Channel Compliance Table</i>.</p> <p>Automatic channel scanning and interference avoidance</p> <p>SSID hiding configuration for each AP</p> <p>SST</p> <p>U-APSD</p>

Item	Description
Network features	<p>Compliance with IEEE 802.3ab</p> <p>Auto-negotiation of the rate and duplex mode and automatic switchover between the MDI and MDI-X</p> <p>Compliance with IEEE 802.1Q</p> <p>SSID-based VLAN assignment</p> <p>DHCP client, obtaining IP addresses through DHCP</p> <p>STA isolation in the same VLAN</p> <p>ACL</p> <p>Unified authentication on the cloud management platform</p> <p>NAT</p> <p>Telemetry, quickly collecting AP status and application experience parameters</p>
QoS features	<p>Priority mapping and scheduling that are compliant with WMM to implement priority-based data processing and forwarding</p> <p>WMM parameter management for each radio</p> <p>WMM power saving</p> <p>Priority mapping for uplink packets; flow-based mapping for downlink packets</p> <p>Queue mapping and scheduling</p> <p>User-based bandwidth limiting</p> <p>Air interface HQoS scheduling</p>
Security features	<p>Open system authentication</p> <p>WEP authentication and encryption using a 64-bit, 128-bit, 152-bit, or 192-bit encryption key</p> <p>WPA2-PSK authentication and encryption (WPA2-Personal)</p> <p>WPA2-802.1X authentication and encryption (WPA2-Enterprise)</p> <p>WPA3 authentication and encryption</p> <p>WPA-WPA2 hybrid authentication</p> <p>WPA2-WPA3 hybrid authentication</p> <p>802.1X authentication, MAC address authentication, Portal authentication, etc.</p> <p>DHCP snooping</p> <p>DAI</p> <p>IPSG</p>
EAP types	<p>EAP-TLS, EAP-TTLS, EAP-PEAP, EAP-CHAP, EAP-SIM, EAP-AKA, EAP-GTC, EAP-FAST, EAP-PEAP, EAP-MD5, EAP-MSCHAPv2, PEAPv0, PEAPv1</p>

Item	Description
Maintenance features	Unified management and maintenance on the cloud management platform Automatic login, automatic configuration loading, and PnP Batch upgrade Telnet STelnet using SSHv2 SFTP using SSHv2 Web-based NMS, and login through HTTP or HTTPS Real-time configuration monitoring and fast fault locating using the NMS System status alarm NTP

## Product Specifications


Item		Description
Technical specifications	Dimensions (diameter x height)	180 mm x 35 mm
	Weight	0.45 kg
	Port	1 x 10M/100M/GE electrical port <b>NOTE</b> The GE electrical port supports PoE IN.
	LED indicator	Indicate the power-on, startup, running, alarm, and fault states of the system.
Power specifications	Power input	<ul style="list-style-type: none"> <li>PoE power supply: in compliance with IEEE 802.3af</li> </ul>
	Maximum power consumption	<ul style="list-style-type: none"> <li>9.4 W</li> </ul> <b>NOTE</b> The actual maximum power consumption depends on local laws and regulations.
Environmental specifications	Operating temperature	0°C to 40°C
	Storage temperature	-40°C to +70°C
	Operating humidity	5% to 95% (non-condensing)

Item		Description
Radio specifications	Altitude	-60 m to +5000 m
	Atmospheric pressure	53 kPa to 106 kPa
	Antenna type	Built-in smart antenna
	Antenna gain	2.4 GHz: 4 dBi 5 GHz: 5 dBi <b>NOTE</b> 1. The preceding gain is the peak gain of a single antenna. 2. Equivalent antenna gain after all 2.4 GHz or 5 GHz antennas are combined: 2 dBi for 2.4 GHz and 3 dBi for 5 GHz.
	Maximum quantity of SSIDs on each radio	8
	Maximum number of STAs	128 <b>NOTE</b> The actual number of users varies according to the environment.
	Maximum transmit power	2.4 GHz: 23 dBm (combined power) 5 GHz: 23 dBm (combined power) <b>NOTE</b> The actual transmit power varies according to local laws and regulations.
	Power adjustment increment	1 dBm
	Frequency bands	2.400 to 2.4835 GHz ISM 5.150 to 5.250 GHz U-NII-1 5.250 to 5.350 GHz U-NII-2A 5.470 to 5.725 GHz U-NII-2C 5.725 to 5.850 GHz U-NII-3/ISM   <b>NOTE</b> The available bands and channels are dependent on the configured regulatory domain (country).


## Standards Compliance

Item	Description		
Safety standards	<ul style="list-style-type: none"><li>• UL 62368-1</li><li>• EN 62368-1</li><li>• IEC 62368-1</li><li>• CSA62368-1</li></ul>		<ul style="list-style-type: none"><li>• GB 4943.1</li></ul>
Radio standards	<ul style="list-style-type: none"><li>• ETSI EN 300 328</li></ul>	<ul style="list-style-type: none"><li>• ETSI EN 301 893</li></ul>	
EMC standards	<ul style="list-style-type: none"><li>• EN 301 489-1</li><li>• EN 301 489-17</li><li>• EN 60601-1-2</li><li>• EN 55024</li><li>• EN 55032</li><li>• EN 55035</li></ul>	<ul style="list-style-type: none"><li>• GB 9254</li><li>• GB 17625.1</li><li>• GB 17625.2</li><li>• CISPR 24</li><li>• CISPR 32</li><li>• CISPR 35</li></ul>	<ul style="list-style-type: none"><li>• IEC/EN 61000-4-2</li><li>• IEC/EN 61000-4-3</li><li>• IEC/EN 61000-4-4</li><li>• IEC/EN 61000-4-5</li><li>• IEC/EN 61000-4-6</li><li>• ICES-003</li></ul>
IEEE standards	<ul style="list-style-type: none"><li>• IEEE 802.11a/b/g</li><li>• IEEE 802.11n</li><li>• IEEE 802.11ac</li><li>• IEEE 802.11ax</li></ul>	<ul style="list-style-type: none"><li>• IEEE 802.11h</li><li>• IEEE 802.11d</li><li>• IEEE 802.11e</li><li>• IEEE 802.11k</li></ul>	<ul style="list-style-type: none"><li>• IEEE 802.11v</li><li>• IEEE 802.11w</li><li>• IEEE 802.11r</li></ul>
Security standards	<ul style="list-style-type: none"><li>• 802.11i, Wi-Fi Protected Access (WPA), WPA2, WPA2-Enterprise, WPA2-PSK, WPA3</li><li>• 802.1X</li><li>• Advanced Encryption Standards (AES), Temporal Key Integrity Protocol (TKIP), WEP, Open</li><li>• EAP Type(s)</li></ul>		
EMF standards	<ul style="list-style-type: none"><li>• EN 62311</li></ul>	<ul style="list-style-type: none"><li>• EN 50385</li></ul>	
RoHS standards	<ul style="list-style-type: none"><li>• Directive 2002/95/EC &amp; 2011/65/EU</li></ul>	<ul style="list-style-type: none"><li>• (EU) 2015/863</li></ul>	
Reach standards	<ul style="list-style-type: none"><li>• Regulation 1907/2006/EC</li></ul>		
WEEE standards	<ul style="list-style-type: none"><li>• Directive 2002/96/EC &amp; 2012/19/EU</li></ul>		


## Antenna Patterns

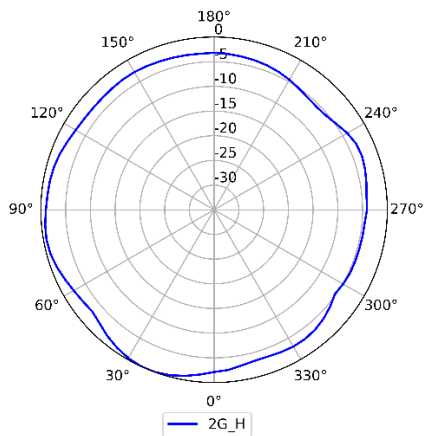


2.4 GHz (horizontal)

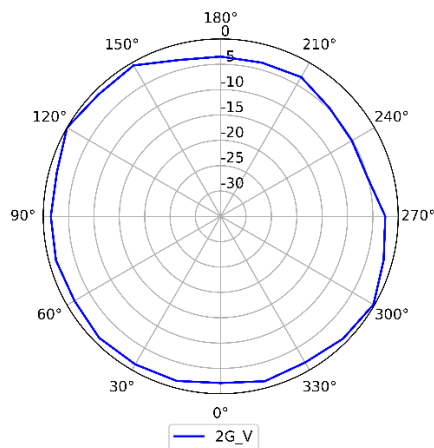

2.4 GHz (vertical)

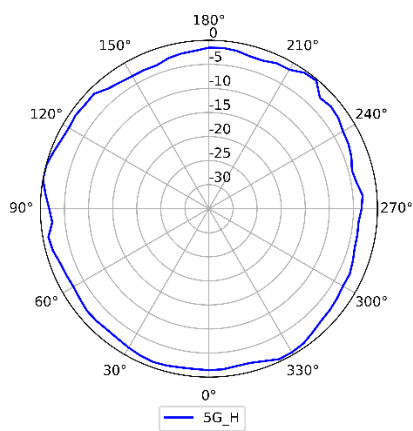

5 GHz (horizontal)

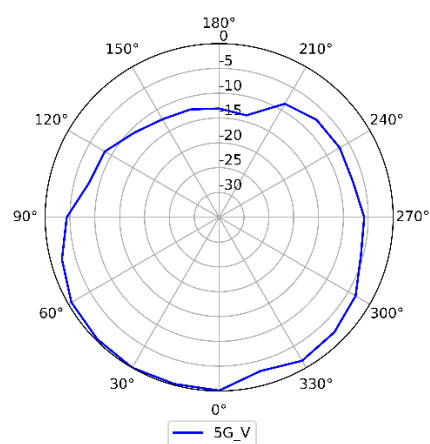

5 GHz (vertical)

## More Information

For more information about Huawei WLAN products, visit <https://e.huawei.com/en> or contact Huawei's local sales office.

Alternatively, you can contact us through one of the following methods:

1. Global service hotline: <https://e.huawei.com/en/about/service-hotline>
2. Enterprise technical support website: <https://support.huawei.com/enterprise/en>
3. Service email address for enterprise users: [support\\_e@huawei.com](mailto:support_e@huawei.com)



**Copyright © Huawei Technologies Co., Ltd. 2024. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

### **Trademarks and Permissions**



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

### **Notice**

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

### **HUAWEI TECHNOLOGIES CO., LTD.**

Address: Huawei Industrial Base, Bantian, Longgang, Shenzhen, People's Republic of China

Post code: 518129

Website: [www.huawei.com](http://www.huawei.com)