





CloudEngine S5751-L Series Remote Unit Switches Brochure









Huawei CloudEngine S5751-L series remote unit switches provide all-GE downlink ports and GE optical uplink ports.









Product Overview


CloudEngine S5751-L series remote units of campus switch are all-gigabit Ethernet switch based on the innovative architecture, provide all-gigabit data access capabilities;Based on the simplified architecture, functions as a remote unit and works with the central switch to implement simplified network deployment;innovative optical/electrical PoE is supported;the central switches provide more than 1000 m PoE power for remote unit; the switches can be widely used in enterprise offices, education, hotels, and healthcare, helping enterprises build green and low-carbon buildings.

Models and Appearances

Models and Appearances	Description
 <p>CloudEngine S5751-L8T2J-RUA</p>	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T ports, 2 x 100M/1/2.5GE SFP ports Power adapter power supply Forwarding performance: 19.5 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L8LP2J-RUA</p>	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T ports(PoE+), 2 x 100M/1/2.5GE SFP ports Power adapter power supply PoE+ Forwarding performance: 19.5 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L8P2J-RUA</p>	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T ports(PoE+), 2 x 100M/1/2.5GE SFP ports Power adapter power supply PoE+ Forwarding performance: 19.5 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L8P2PN2J-RUA</p>	<ul style="list-style-type: none"> 6 x 10/100/1000 Base-T ports(PoE+), 2 x 10/100/1000 Base-T ports, 2 x 10/100/1000/2.5G Base-T ports(PoE+), 2 x 100M/1/2.5GE SFP ports Power adapter power supply PoE+ Forwarding performance: 27 Mpps Switching capacity: 98 Gbps

Models and Appearances	Description
 CloudEngine S5751-L8T2X-RUA	<ul style="list-style-type: none"> 8 x 10/100/1000Base-T ports, 2 x 100M/1/2.5/10GE SFP+ ports Power adapter power supply Forwarding performance: 42 Mpps Switching capacity: 98 Gbps
 CloudEngine S5751-L8LP2X-RUA	<ul style="list-style-type: none"> 8 x 10/100/1000Base-T ports(PoE+), 2 x 100M/1/2.5/10GE SFP+ ports Power adapter power supply PoE+ Forwarding performance: 42 Mpps Switching capacity: 98 Gbps
 CloudEngine S5751-L8P2X-RUA	<ul style="list-style-type: none"> 8 x 10/100/1000Base-T ports(PoE+), 2 x 100M/1/2.5/10GE SFP+ ports Power adapter power supply PoE+ Forwarding performance: 42 Mpps Switching capacity: 98 Gbps
 CloudEngine S5751-L8P2PN2X-RUA	<ul style="list-style-type: none"> 6 x 10/100/1000 Base-T ports(PoE+), 2 x 10/100/1000 Base-T ports, 2 x 10/100/1000/2.5G Base-T ports(PoE+), 2 x 100M/1/2.5/10GE SFP+ ports Power adapter power supply PoE+ Forwarding performance: 49.5 Mpps Switching capacity: 98 Gbps
 CloudEngine S5751-L8T2HJ-RUA	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T ports, 2 x 100M/1/2.5GE SFP ports(hybrid optical-electrical) 2 x Hybrid power cable, 2 x Phoenix terminal or Power adapter power supply Forwarding performance: 19.5 Mpps Switching capacity: 98 Gbps
 CloudEngine S5751-L8P2HJ-RUA	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T ports(PoE+), 2 x 100M/1/2.5GE SFP ports(hybrid optical-electrical) 2 x Hybrid power cable, 2 x Phoenix terminal or Power adapter power supply PoE+ Forwarding performance: 19.5 Mpps Switching capacity: 98 Gbps
 CloudEngine S5751-L8T2HX-RUA	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T ports, 2 x 100M/1/2.5/10GE SFP+ ports(hybrid optical-electrical) 2 x Hybrid power cable, 2 x Phoenix terminal or Power adapter power supply Forwarding performance: 42 Mpps Switching capacity: 98 Gbps
 CloudEngine S5751-L8P2HX-RUA	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T ports(PoE+), 2 x 100M/1/2.5/10GE SFP+ ports(hybrid optical-electrical) 2 x Hybrid power cable, 2 x Phoenix terminal or Power adapter power supply PoE+

Models and Appearances	Description
	<ul style="list-style-type: none"> Forwarding performance: 42 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L8P2PN2HX-RUA</p>	<ul style="list-style-type: none"> 6 x 10/100/1000 Base-T ports(PoE+), 2 x 10/100/1000 Base-T ports, 2 x 10/100/1000/2.5G Base-T ports(PoE+), 2 x 100M/1/2.5/10GE SFP+ ports(hybrid optical-electrical) 2 x Hybrid power cable, 2 x Phoenix terminal or Power adapter power supply PoE+ Forwarding performance: 49.5 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L4LP8UN2X-RUA</p>	<ul style="list-style-type: none"> 4 x 10/100/1000 Base-T ports(PoE+), 8 x 10/100/1000/2.5G Base-T ports(4 PoE+, 4 PoE++), 2 x 100M/1/2.5/10GE SFP+ ports Power adapter power supply PoE+/PoE++ Forwarding performance: 66 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L8LP4UN2X-RUA</p>	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T ports(PoE+), 4 x 10/100/1000/2.5G Base-T ports(PoE++), 2 x 100M/1/2.5/10GE SFP+ ports Power adapter power supply PoE+/PoE++ Forwarding performance: 57 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L16LP4UN2X-RUA</p>	<ul style="list-style-type: none"> 16 x 10/100/1000 Base-T ports(PoE+), 4 x 10/100/1000/2.5G Base-T ports(PoE++), 2 x 100M/1/2.5/10GE SFP+ ports Power adapter power supply PoE+/PoE++ Forwarding performance: 69 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L24T2J-RUA</p>	<ul style="list-style-type: none"> 24 x 10/100/1000 Base-T ports, 2 x 100M/1/2.5GE SFP ports Built-in AC Forwarding performance: 43.5 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L24P2J-RUA</p>	<ul style="list-style-type: none"> 24 x 10/100/1000 Base-T ports(PoE+), 2 x 100M/1/2.5GE SFP ports Built-in AC PoE+ Forwarding performance: 43.5 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L24T2X-RUA</p>	<ul style="list-style-type: none"> 24 x 10/100/1000 Base-T ports, 2 x 100M/1/2.5/10GE SFP+ ports Built-in AC Forwarding performance: 66 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L24P2X-RUA</p>	<ul style="list-style-type: none"> 24 x 10/100/1000 Base-T ports(PoE+), 2 x 100M/1/2.5/10GE SFP+ ports Built-in AC PoE+

Models and Appearances	Description
	<ul style="list-style-type: none"> Forwarding performance: 66 Mpps Switching capacity: 98 Gbps
 <p>CloudEngine S5751-L24P2PN2X-RUA</p>	<ul style="list-style-type: none"> 22 x 10/100/1000 Base-T ports(PoE+), 2 x 10/100/1000 Base-T ports, 2 x 10/100/1000/2.5G Base-T ports(PoE+), 2 x 100M/1/2.5/10GE SFP+ ports Built-in AC PoE+ Forwarding performance: 73.5 Mpps Switching capacity: 98 Gbps

Features and Highlights

Simplified Architecture

Based on Huawei's unique simplified architecture, the traditional three-layer architecture of access, aggregation, and core is simplified into a two-layer architecture of access and core, greatly reducing network deployment and management complexity.

- Based on the simplified architecture, the access switches splits into the central switches and the remote units. The remote units function as the port expansion module of the central switch to flexibly expand the port capacity of the central switch. One device is a network.
- The remote units are connected to the central switch through optical cables or optical-electrical hybrid cables, which does not require planning, configuration, management, and plug-and-play. When a device is expanded or faulty, replace the device with a new one, simplifying network planning, deployment, and routine O&M.

Note: The CloudEngine S16700/S12700E/S8700/S7700/S6700/S5700 series switches can be upgraded to R24C00 or a later version and can work with remote modules to implement simplified networking.

Fast Access

- The remote units provide the full line-speed forwarding capability. All ports support non-blocking data packet forwarding, providing users with high-speed access experience and meeting the requirements of high-bandwidth services such as HD video conferencing, online video, and large file download.

Ultra-low Power Consumption

- All models of remote units use energy-saving chips and part models support no fans to achieve ultra-low power consumption. The average maximum power consumption of a single port is less than 1 W, saving 30% compared with traditional switches.

Flexible Deployment

- Flexible installation: Supports flexible installation modes, such as wall-mounted, and desktop-mounted, meeting installation requirements.
- Flexible power supply: The supports local power supply based on power adapters and remote PoE power supply based on optical/electrical hybrid cables, making device site selection more flexible.

PoE Power Supply

- Perpetual PoE: When a PoE switch is rebooted after the software version is upgraded, the power supply to PDs is not interrupted. This capability ensures that PDs are not powered off during the switch reboot.
- Fast PoE: PoE switches can supply power to PDs within 10s after they are powered on. This is different from common switches that generally take 1 to 3 minutes to start to supply power to PDs. When a PoE switch reboots due to a power failure, the PoE switch continues to supply power to the PDs immediately after being powered on without waiting until it finishes reboot. This greatly shortens the power failure time of PDs.

Various PoE Features

The remote units of PoE module support PoE++ and provides data access and power supply for terminals such as Wi-Fi 6 APs, IP cameras, and IP phones. Some remote modules can provide power supply based on optical-electrical hybrid cable. In this way, the power supply is centralized and the network is disconnected from the power supply.

Intelligent O&M

Central switch collects status data of itself and remote units and sends the data to CampusInsight in real time based on Telemetry. CampusInsight analyzes the network data using the intelligent fault identification algorithm to accurately display the real-time network status. In addition, it can effectively demarcate faults and locate fault causes in a timely manner, identify network problems that affect user experience, and accurately ensure user experience.

Intelligent Upgrade

- Remote units can be upgraded intelligently by using the central switch. First, the central switch obtains the version upgrade path from the HOUP and downloads the new version for upgrade. The upgrade process is highly automated, achieving one-click upgrade. In addition, pre-loading versions are supported, which greatly shortens the upgrade time and service interruption time. After the remote module goes online, the central switch automatically matches the software version of the remote units and upgrades the software version as required.
- Intelligent upgrade greatly simplifies device upgrade operations, makes it possible for customers to upgrade versions independently, and greatly reduces maintenance costs. In addition, the upgrade policy of the HOUP platform is used to regulate the upgrade path, which greatly reduces the upgrade failure risk.

Cloud Management

The remote units function as the port expansion module of the central switch and is managed by the central switch in a unified manner. In addition, Huawei cloud management platform can use the central switch to implement visualized management for all connected remote units, including cloud configuration, monitoring, and inspection. This reduces onsite deployment and O&M manpower and reduces network OPEX.

Product Specifications

Item	CloudEngine S5751-L8T2J-RUA	CloudEngine S5751-L8LP2J-RUA	CloudEngine S5751-L8P2J-RUA
Uplink port	2 个 100M/GE/2.5GE SFP ports	2 个 100M/GE/2.5GE SFP ports	2 个 100M/GE/2.5GE SFP ports
Downlink port	8 x 10/100/1000BASE-T ports	8 x 10/100/1000BASE-T ports, PoE+	8 x 10/100/1000BASE-T ports, PoE+
Dimensions (H x W x D)	35x195x130mm	43.6x195x160mm	43.6x195x160mm
Chassis weight	0.83 kg	0.6 kg	0.6 kg
Installation methods	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting
Power supply type	Power adapter	Power adapter	Power adapter
Rated voltage range	12V	56V	12V
Maximum power consumption	7.46 W	<ul style="list-style-type: none">7 W (without PD)88 W (with PD, PD power consumption of 77 W)	5.06 W
operating temperature	-5°C to +45°C	-5°C to +45°C	-5°C to +45°C
Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C

Item	CloudEngine S5751-L8T2J-RUA	CloudEngine S5751-L8LP2J-RUA	CloudEngine S5751-L8P2J-RUA
Relative humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
Surge protection specification (power port)	Differential mode: ± 4 kV; common mode: ± 4 kV	Differential mode: ± 4 kV; common mode: ± 4 kV	Differential mode: ± 4 kV; common mode: ± 4 kV
Heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation

Item	CloudEngine S5751-L8T2X-RUA	CloudEngine S5751-L8LP2X-RUA	CloudEngine S5751-L8P2X-RUA
Uplink port	2 x 100M/1/2.5/10GE SFP+ ports	2 x 100M/1/2.5/10GE SFP+ ports	2 x 100M/1/2.5/10GE SFP+ ports
Downlink port	8 x 10/100/1000BASE-T ports	8 x 10/100/1000BASE-T ports, PoE+	8 x 10/100/1000BASE-T ports, PoE+
Dimensions (H x W x D)	93x285x190mm	116x285x300mm	116x285x300mm
Chassis weight	0.6 kg	0.6 kg	0.6 kg
Installation methods	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting
Power supply type	Power adapter or Optical-electrical PoE power supply	Power adapter, PoE or Optical-electrical PoE power supply	Power adapter PoE or Optical-electrical PoE power supply
Rated voltage range	56V	56V	56V
Maximum power consumption	<ul style="list-style-type: none"> 7 W (without PD) 88.5 W (with PD, PD power consumption of 77 W) 	<ul style="list-style-type: none"> 7 W (without PD) 88 W (with PD, PD power consumption of 77 W) 	<ul style="list-style-type: none"> 9.6 W (without PD) 146 W (with PD, PD power consumption of 131 W)
operating temperature	-5°C to +40°C	-5°C to +45°C	-5°C to +45°C
Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
Relative humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
Surge protection specification (power port)	Differential mode: ± 4 kV; common mode: ± 4 kV	Differential mode: ± 4 kV; common mode: ± 4 kV	Differential mode: ± 4 kV; common mode: ± 4 kV
Heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation

Item	CloudEngine S5751-L8T2HJ-RUA	CloudEngine S5751-L8P2HJ-RUA	CloudEngine S5751-L8T2HX-RUA	CloudEngine S5751-L8P2HX-RUA
Uplink port	2 x 100M/1/2.5GE SFP ports(hybrid optical-electrical)	2 x 100M/1/2.5GE SFP ports(hybrid optical-electrical)	2 x 100M/1/2.5/10GE SFP+ ports(hybrid optical-electrical)	2 x 100M/1/2.5/10GE SFP+ ports(hybrid optical-electrical)
Downlink port	8 x 10/100/1000BASE-T ports	8 x 10/100/1000BASE-T ports, PoE+	8 x 10/100/1000BASE-T	8 x 10/100/1000BASE-T ports, PoE+

Item	CloudEngine S5751-L8T2HJ-RUA	CloudEngine S5751-L8P2HJ-RUA	CloudEngine S5751-L8T2HX-RUA	CloudEngine S5751-L8P2HX-RUA
			ports	
Dimensions (H x W x D)	116x285x225mm	116x285x225mm	116x285x225mm	116x285x225mm
Chassis weight	1.36 kg	3.65 kg	3.65 kg	3.65 kg
Installation methods	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting
Power supply type	Power adapter	Built-in AC	Built-in AC	Built-in AC
Rated voltage range	Power adapter input: 100–240 V AC; 50/60 Hz Power adapter output: 56 V DC	AC input: 90 V AC to 300 V AC; 47 Hz to 63 Hz	AC input: 90 V AC to 300 V AC; 47 Hz to 63 Hz	AC input: 90 V AC to 300 V AC; 47 Hz to 63 Hz
Maximum power consumption	<ul style="list-style-type: none"> 9W (without PD) 59.6 W (with PD, PD power consumption of 45 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W)
operating temperature	-5°C to +45°C	-5°C to +45°C	-5°C to +45°C	-5°C to +45°C
Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
Relative humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
Surge protection specification (power port)	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV
Heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation

Item	CloudEngine S5751-L8P2PN2J-RUA	CloudEngine S5751-L8P2PN2X-RUA	CloudEngine S5751-L8P2PN2HX-RUA	CloudEngine S5751-L24P2PN2X-RUA
Uplink port	2 ↑ 100M/GE/2.5GE SFP ports	2 x 100M/1/2.5/10GE SFP+ ports	2 x 100M/1/2.5/10GE SFP+ ports(hybrid optical-electrical)	2 x 100M/1/2.5/10GE SFP+ ports
Downlink port	6 x 10/100/1000 Base-T ports(PoE+), 2 x 10/100/1000 Base-T ports, 2 x 10/100/1000/2.5G Base-T ports(PoE+)	6 x 10/100/1000 Base-T ports(PoE+), 2 x 10/100/1000 Base-T ports, 2 x 10/100/1000/2.5G Base-T ports(PoE+)	6 x 10/100/1000 Base-T ports(PoE+), 2 x 10/100/1000 Base-T ports, 2 x 10/100/1000/2.5G Base-T ports(PoE+)	22 x 10/100/1000 Base-T ports(PoE+), 2 x 10/100/1000 Base-T ports, 2 x 10/100/1000/2.5G Base-T ports(PoE+)
Dimensions (H x W x D)	116x285x300mm	116x285x300mm	116x285x225mm	43.6x442x220mm

Item	CloudEngine S5751-L8P2PN2J-RUA	CloudEngine S5751-L8P2PN2X-RUA	CloudEngine S5751-L8P2PN2HX-RUA	CloudEngine S5751-L24P2PN2X-RUA
Chassis weight	1.36 kg	3.65 kg	3.65 kg	3.65 kg
Installation methods	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting
Power supply type	Power adapter	Built-in AC	Built-in AC	Built-in AC
Rated voltage range	Power adapter input: 100–240 V AC; 50/60 Hz Power adapter output: 56 V DC	AC input: 90 V AC to 300 V AC; 47 Hz to 63 Hz	AC input: 90 V AC to 300 V AC; 47 Hz to 63 Hz	AC input: 90 V AC to 300 V AC; 47 Hz to 63 Hz
Maximum power consumption	<ul style="list-style-type: none"> 9W (without PD) 59.6 W (with PD, PD power consumption of 45 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W)
operating temperature	-5°C to +45°C	-5°C to +45°C	-5°C to +45°C	-5°C to +45°C
Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
Relative humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
Surge protection specification (power port)	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV
Heat dissipation	No fans, Natural heat dissipation	No fans, Natural heat dissipation	No fans, Natural heat dissipation	No fans, Natural heat dissipation

Item	CloudEngine S5751-L24T2J-RUA	CloudEngine S5751-L24P2J-RUA	CloudEngine S5751-L24T2X-RUA	CloudEngine S5751-L24P2X-RUA
Uplink port	2 ↑ 100M/GE/2.5GE SFP ports	2 ↑ 100M/GE/2.5GE SFP ports	2 x 100M/1/2.5/10GE SFP+ ports	2 x 100M/1/2.5/10GE SFP+ ports
Downlink port	24 x 10/100/1000 Base-T ports	24 x 10/100/1000 Base-T ports(PoE+)	24 x 10/100/1000 Base-T ports	24 x 10/100/1000 Base-T ports(PoE+)
Dimensions (H x W x D)	43.6x442x220mm	43.6x442x220mm	43.6x442x220mm	43.6x442x220mm
Chassis weight	2.94 kg	3.85 kg	3.65 kg	3.65 kg
Installation methods	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting
Power supply type	Power adapter	Built-in AC	Built-in AC	Built-in AC
Rated voltage range	Power adapter input: 100–240 V AC; 50/60	AC input: 90 V AC to 300 V AC; 47 Hz to 63	AC input: 90 V AC to 300 V AC; 47 Hz to 63	AC input: 90 V AC to 300 V AC; 47 Hz to 63

Item	CloudEngine S5751-L24T2J-RUA	CloudEngine S5751-L24P2J-RUA	CloudEngine S5751-L24T2X-RUA	CloudEngine S5751-L24P2X-RUA
	Hz Power adapter output: 56 V DC	Hz	63 Hz	Hz
Maximum power consumption	<ul style="list-style-type: none"> 9W (without PD) 59.6 W (with PD, PD power consumption of 45 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W) 	<ul style="list-style-type: none"> 16.7 W (without PD) 160.45 W (with PD, PD power consumption of 125 W)
operating temperature	-5°C to +45°C	-5°C to +45°C	-5°C to +45°C	-5°C to +45°C
Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
Relative humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
Surge protection specification (power port)	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV	Differential mode: ±4 kV; common mode: ±4 kV
Heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation	No fans,Natural heat dissipation


Item	CloudEngine S5751-L4LP8UN2X-RUA	CloudEngine S5751-L8LP4UN2X-RUA	CloudEngine S5751-L16LP4UN2X-RUA
Uplink port	2 x 100M/1/2.5/10GE SFP+ ports	2 x 100M/1/2.5/10GE SFP+ ports	2 x 100M/1/2.5/10GE SFP+ ports
Downlink port	4 x 10/100/1000 Base-T ports(PoE+), 8 x 10/100/1000/2.5G Base-T ports(4 PoE+, 4 PoE++)	8 x 10/100/1000 Base-T ports(PoE+), 4 x 10/100/1000/2.5G Base-T ports(PoE++)	16 x 10/100/1000 Base-T ports(PoE+), 4 x 10/100/1000/2.5G Base-T ports(PoE++)
Dimensions (H x W x D)	43.6x250x180mm	43.6x442x220mm	43.6x442x220mm
Chassis weight	2.52 kg	2.54 kg	2.56 kg
Installation methods	Desk or Wall mounting	Desk or Wall mounting	Desk or Wall mounting
Power supply type	Power adapter	Power adapter	Power adapter
Rated voltage range	Power adapter input: 170 V AC to 240 V AC; 50/60 Hz Power adapter output: 54 V DC	Power adapter input: 170 V AC to 240 V AC; 50/60 Hz Power adapter output: 54 V DC	Power adapter input: 170 V AC to 240 V AC; 50/60 Hz Power adapter output: 54 V DC
Input voltage range	170 V AC to 264 V AC; 47 Hz to 63 Hz	170 V AC to 264 V AC; 47 Hz to 63 Hz	170 V AC to 264 V AC; 47 Hz to 63 Hz
Maximum power consumption	<ul style="list-style-type: none"> Without PoE: 24.5 W (device only)/29.9 W (device + adapter) 	<ul style="list-style-type: none"> Without PoE: 19.4 W (device only)/24.1 W (device + adapter) 	<ul style="list-style-type: none"> Without PoE: 25.0 W (device only)/30.1 W (device + adapter)

Item	CloudEngine S5751-L4LP8UN2X-RUA	CloudEngine S5751-L8LP4UN2X-RUA	CloudEngine S5751-L16LP4UN2X-RUA
	<ul style="list-style-type: none"> Full PoE load: 164.7 W (PoE: 125 W) 	<ul style="list-style-type: none"> Full PoE load: 159.9 W (PoE: 125 W) 	<ul style="list-style-type: none"> Full PoE load: 164.3 W (PoE: 125 W)
operating temperature	-5°C to +45°C	-5°C to +45°C	-5°C to +45°C
Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
Relative humidity	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
Surge protection specification (power port)	Differential mode: ± 4 kV; common mode: ± 4 kV	Differential mode: ± 4 kV; common mode: ± 4 kV	Differential mode: ± 4 kV; common mode: ± 4 kV
Heat dissipation	No fans, Natural heat dissipation	No fans, Natural heat dissipation	No fans, Natural heat dissipation

Networking and Applications

Large-Scale Enterprise Campus Network


CloudEngine S12700E or S7700 switches are used as the core of the campus network. Independent firewalls are used to implement platform security in the DMZ. Central switches and remote units as access switches to provide wired or wireless access services for campus terminals. These switches can be widely used in government and enterprise offices, commercial buildings, energy and electricity, manufacturing and other industries

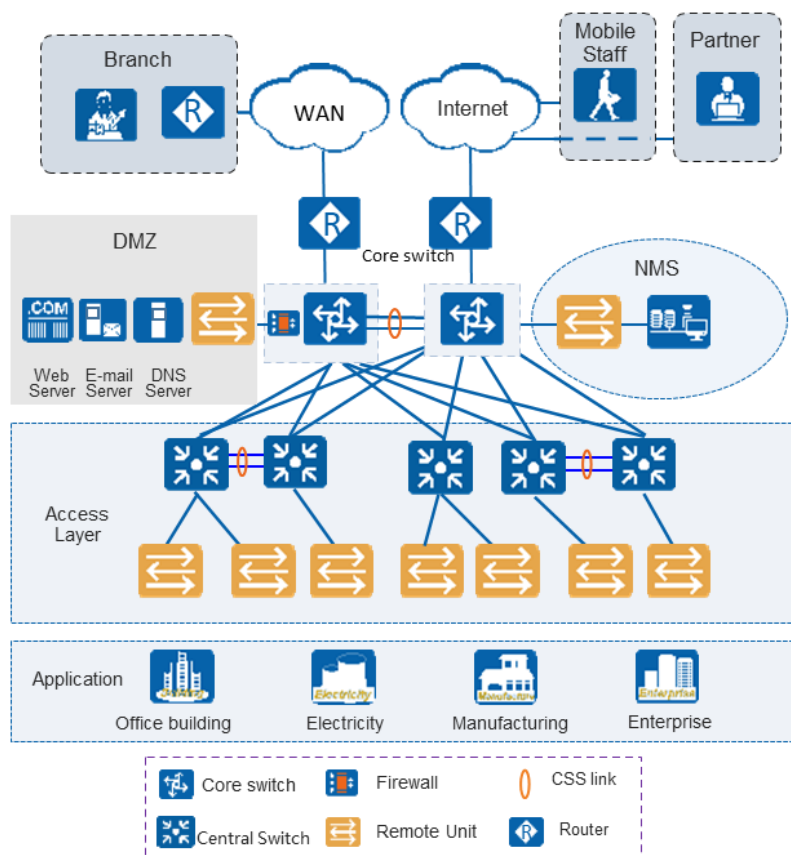

Small- or Medium-scale Enterprise Campus Network

CloudEngine S6730 or S5730 series switches are used as the core of small- and medium-sized campus networks. Independent firewalls are used to implement platform security in the DMZ zone. The central switch uses remote modules to flexibly expand

ports. The remote modules provide PoE capabilities on demand for IP phones. The camera provides data access and power supply.

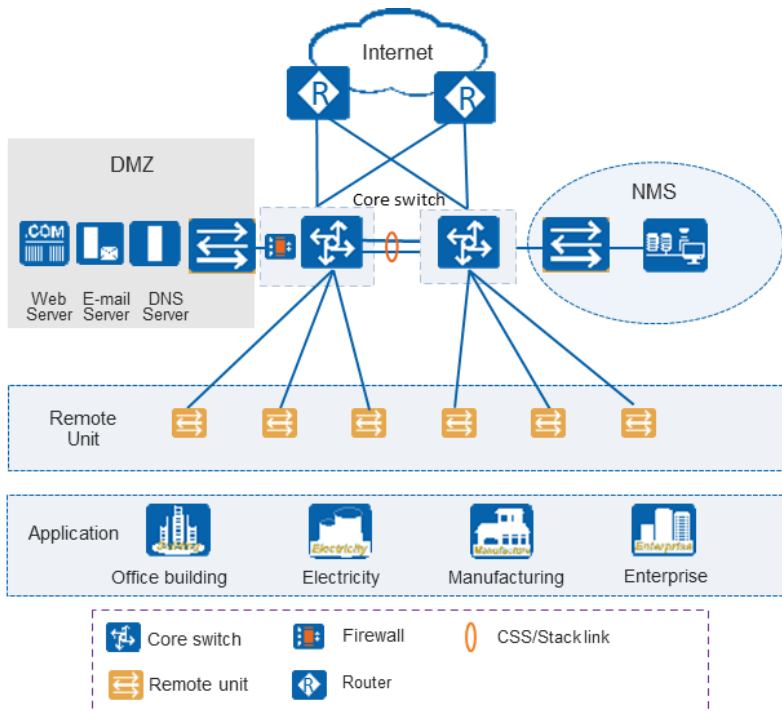

Ordering Information

Model	Product Description
CloudEngine S5751-L8T2X-RUA	S5751-L8T2X-RUA(8*10/100/1000BASE-T ports, 2*10GE SFP+ ports, with 1*AC power adapter, Fanless)
CloudEngine S5751-L8T2J-RUA	S5751-L8T2J-RUA(8*10/100/1000BASE-T ports, 2*2.5GE SFP ports, with 1*AC power adapter, Fanless)
CloudEngine S5751-L8LP2X-RUA	S5751-L8LP2X-RUA(8*10/100/1000BASE-T ports(PoE+), 2*10GE SFP+ ports, 35 W PoE, with 1*AC power adapter, Fanless)
CloudEngine S5751-L8LP2J-RUA	S5751-L8LP2J-RUA(8*10/100/1000BASE-T ports(PoE+), 2*2.5GE SFP ports, 35 W PoE, with 1*AC power adapter, Fanless)
CloudEngine S5751-L8P2X-RUA	S5751-L8P2X-RUA(8*10/100/1000BASE-T ports(PoE+), 2*10GE SFP+ ports, 128 W PoE, with 1*220 V AC power adapter, Fanless)
CloudEngine S5751-L8P2J-RUA	S5751-L8P2J-RUA(8*10/100/1000BASE-T ports(PoE+), 2*2.5GE SFP ports, 128 W PoE, with 1*220 V AC power adapter, Fanless)
CloudEngine S5751-L8T2HX-RUA	S5751-L8T2HX-RUA(8*10/100/1000BASE-T ports, 2*Hybrid 10GE SFP+ ports, PoE via hybrid cable, Fanless)
CloudEngine S5751-L8T2HJ-RUA	S5751-L8T2HJ-RUA(8*10/100/1000BASE-T ports, 2*Hybrid 2.5G SFP ports, PoE via hybrid cable, Fanless)
CloudEngine S5751-L8P2HX-RUA	S5751-L8P2HX-RUA(8*10/100/1000BASE-T ports(PoE+), 2*Hybrid 10GE SFP+ ports, PoE via hybrid cable, Fanless)
CloudEngine S5751-L8P2HJ-RUA	S5751-L8P2HJ-RUA(8*10/100/1000BASE-T ports(PoE+), 2*Hybrid 2.5G SFP ports, PoE via hybrid cable, Fanless)
CloudEngine S5751-L8P2PN2J-RUA	S5751-L8P2PN2J-RUA(8*10/100/1000BASE-T ports(6*PoE+), 2*10/100/1000/2.5GBASE-T Ports(PoE+), 2*2.5GE SFP ports, 128 W PoE, with 1*220 V AC power adapter, Fanless)

Model	Product Description
CloudEngine S5751-L8P2PN2X-RUA	S5751-L8P2PN2X-RUA(8*10/100/1000BASE-T ports(6*PoE+), 2*10/100/1000/2.5GBASE-T Ports(PoE+), 2*10GE SFP+ ports, 128 W PoE, with 1*220 V AC power adapter, Fanless)
CloudEngine S5751-L8P2PN2HX-RUA	S5751-L8P2PN2HX-RUA(8*10/100/1000BASE-T ports(6*PoE+), 2*10/100/1000/2.5GBASE-T Ports(PoE+), 2*Hybrid 10GE SFP+ ports, PoE via hybrid cable, Fanless)
CloudEngine S5751-L4LP8UN2X-RUA	S5751-L4LP8UN2X-RUA (4*10/100/1000BASE-T ports(PoE+), 8*10M/100M/1G/2.5GBASE-T ports(4*PoE+, 4*PoE++), 2*10GE SFP+ ports, 128W PoE, 1*AC power adapter, Fanless)
CloudEngine S5751-L8LP4UN2X-RUA	S5751-L8LP4UN2X-RUA (8*10/100/1000BASE-T ports(PoE+), 4*10M/100M/1G/2.5GBASE-T ports(PoE++), 2*10GE SFP+ ports, 128W PoE, with 1*AC power adapter, Fanless)
CloudEngine S5751-L16LP4UN2X-RUA	S5751-L16LP4UN2X-RUA (16*10/100/1000BASE-T ports(8*PoE+), 4*10M/100M/1G/2.5GBASE-T ports(PoE++), 2*10GE SFP+ ports, 128W PoE, 1*AC power adapter, Fanless)
CloudEngine S5751-L24T2J-RUA	S5751-L24T2J-RUA(24*10/100/1000BASE-T ports, 2*2.5GE SFP ports, built-in AC power, Fanless)
CloudEngine S5751-L24T2X-RUA	S5751-L24T2X-RUA(24*10/100/1000BASE-T ports, 2*10GE SFP+ ports, built-in AC power, Fanless)
CloudEngine S5751-L24P2J-RUA	S5751-L24P2J-RUA(24*10/100/1000BASE-T ports(PoE+), 2*2.5GE SFP ports, 400 W PoE, built-in AC power)
CloudEngine S5751-L24P2X-RUA	S5751-L24P2X-RUA(24*10/100/1000BASE-T ports(PoE+), 2*10GE SFP+ ports, 400 W PoE, built-in AC power)
CloudEngine S5751-L24P2PN2X-RUA	S5751-L24P2PN2X-RUA(24*10/100/1000BASE-T ports(22*PoE+), 2*10/100/1000/2.5GBASE-T Combo(PoE+), 2*10GE SFP+ ports, 400 W PoE, built-in AC power)
12W Power adapter	Power adapter
90W PoE Power adapter	PoE Power adapter
150W PoE Power adapter	PoE power adapter

More Information


For more information about Huawei Campus Switches, visit <http://e.huawei.com> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2025. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China

Website: e.huawei.com

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.